
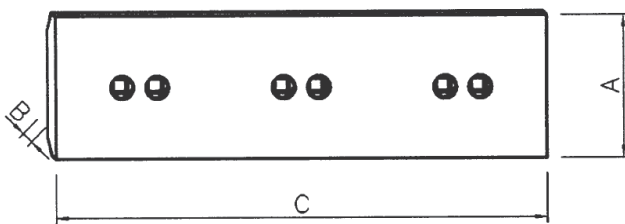


## Unterschraubmesser / Bolt-on cutting edges

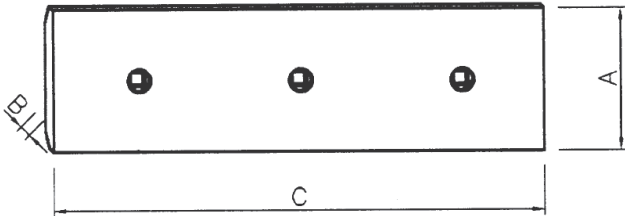

### Unterschraubmesser

- Aus warmgewalztem, hochverschleißfestem Borstahl, gehärtet auf ca. 500 HB

### Bolt-on cutting edges

- Made of hot rolled Boron steel, hardened to approx. 500 HB

Abmessungen (mm) Dimensions (mm)				Gewicht Weight KG	Bohr- löcher Holes	Ref.-Nr. Ref.-No.	Modell Model	VeRotool-Bestell-Nr VeRotool-No.
A	B	C	Ø bolt (H)					
250	25	1398	7/8	65,0	4	42Y-70-H2N60	WA200-5/6 WA250-5/6	600.42Y-70-H2N60
250	25	570	7/8	26,0	4	42Y-70-H2N70	WA270-3	600.42Y-70-H2N70
330	30	1608	7/8	119,0	4	419-70-H2C80	WA320-3/5/6	600.419-70-H2C80
330	30	1624	7/8	120,0	4	423-70-H2C50	WA380-3/5/6	600.423-70-H2C50
330	30	570	7/8	41,0	4	424-70-H2C30	WA320-3/5/6 WA420-3	600.424-70-H2C30
330	30	1698	7/8	119,0	5	424-70-H2910	WA380-7	600.4WA-380-2910
330	30	650	7/8	45,5	6	424-70-H2920	WA380-7	600.4WA-380-2920
330	30	1698	7/8	125,0	4	424-70-H2D50	WA400-5 WA430-6 WA470-3/5/6	600.424-70-H2D50
330	30	650	7/8	47,0	4	424-70-H2D60	WA380-3/5/6 WA400-5 WA420-3 WA430-6 WA470-3/5/6	600.424-70-H2D60
330	30	1868	7/8	138,0	5	424-70-H2D80	WA480-5/6 WA470-3/5/6 WA480-5	600.424-70-H2D80

Weitere Abmessungen auf Anfrage / Further dimensions on request