
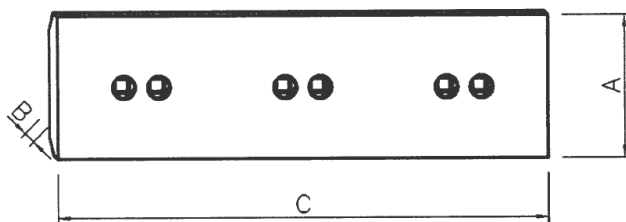


Unterschraubmesser / Bolt-on cutting edges

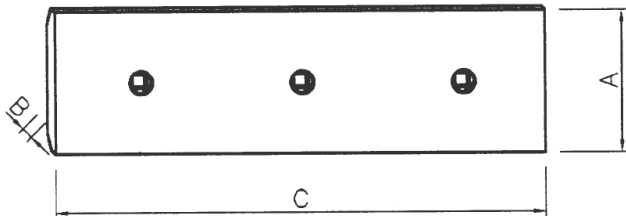

Unterschraubmesser

- Aus warmgewalztem, hochverschleißfestem Borstahl, gehärtet auf ca. 500 HB

Bolt-on cutting edges

- Made of hot rolled Boron steel, hardened to approx. 500 HB

Abmessungen (mm) Dimensions (mm)				Gewicht Weight KG	Bohr- löcher Holes	Ref.-Nr. Ref.-No.	Modell Model	VeRotool-Bestell-Nr VeRotool-No.
A	B	C	Ø bolt (")					
280	25	460	1	22,0	2	9134397	L531, L538, L542	600.9134397
280	25	782	1	37,0	3	9134398	L531, L538, L542	600.9134398
280	25	886	1	42,0	3	9134452	L538, L542	600.9134452
280	25	836	1	40,0	3	9136040	L538, L542	600.9136040
330	40	584	1 1/4	61,0	2	9504409	L556, L566, L576	600.9504409
330	40	912	1 1/4	96,0	3	9504411	L556, L566, L576	600.9504411
200	20	832	3/4	24,0	2	9509258	L514	600.9509258
200	20	782	3/4	23,0	2	9509333	L514	600.9509333
330	40	1060	1 1/4	105,0	3	9608746	L580	600.9608746